


SUNFLEX PVC GRIT HOSE



"Cross-sectional View"

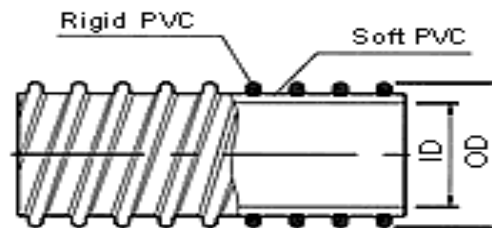

- Application** : Ship-building Yard And Ships
 : Suction And Discharge For Sand, Gravel, Cement And Iron etc
 : Transfer Of Various Powder And Granule
 : Suction And Press-transfer Of Various Grains
- Characteristics** : Soft PVC Compound And Rigid PVC Helix Have Been Developed Specially And Produced.
 Therefore, Excellent Abrasion Heat And Cold Resistance
- Structure** : The Design Is Similar To The Low Pressure Flexible Hose Of High Flexibility. It Is Made By Fusion Adhesion Together With The Specially Developed Materials To Meet With The Properties Of Abrasion And The Duration Against Tube And Cover Pressure

Part No.	I.D.		O.D.		Working Pressure	Bend Radius		Standard Length
	inch	mm	inch	mm		inch	mm	
GSD043-0150	1-1/2"	38.1	1-61/64	49.5	43.5	5-29/32	150.0	20/30
GSD036-0200	2"	50.8	2-27/64	61.5	36.3	6-13/64	160.0	20/30
GSD036-0250	2-1/2"	63.5	2-31/32	75.5	36.3	7	180.0	20/30
GSD036-0300	3"	76.2	3-35/64	90.2	36.3	8-13/64	210.0	20/30
GSD036-0400	4"	101.6	4-3/4	120.6	36.3	10-39/64	270.0	20/30
GSD036-0500	5"	127.0	5-55/64	149.0	36.3	13-45/64	350.0	20/30
GSD029-0600	6"	152.4	6-61/64	176.4	29.0	16-1/2	420.0	20/30
GSD029-0800	8"	203.2	9-1/32	229.2	29.0	18-13/16	480.0	20/30