



Safety Breakaway Couplings

The Safe Solution
for you and
the environment



Safety Breakaway Couplings

Specifications

Size Range

Standard nominal bores

1.5", 2", 2.5", 3", 4", 5", 6", 8", 10, 12"

End Connections

Threaded male or female tapered or parallel flanged.

Weld prepared ends non-standard configurations are also available on request.

Breakload Settings

Coupling breakloads can be designed to any application criteria.

Pressure Ratings

Standard range up to 40 Bar design pressure (higher ratings available)


Materials

Stainless Steel

Carbon Steel

Aluminium

(Other materials available on request)

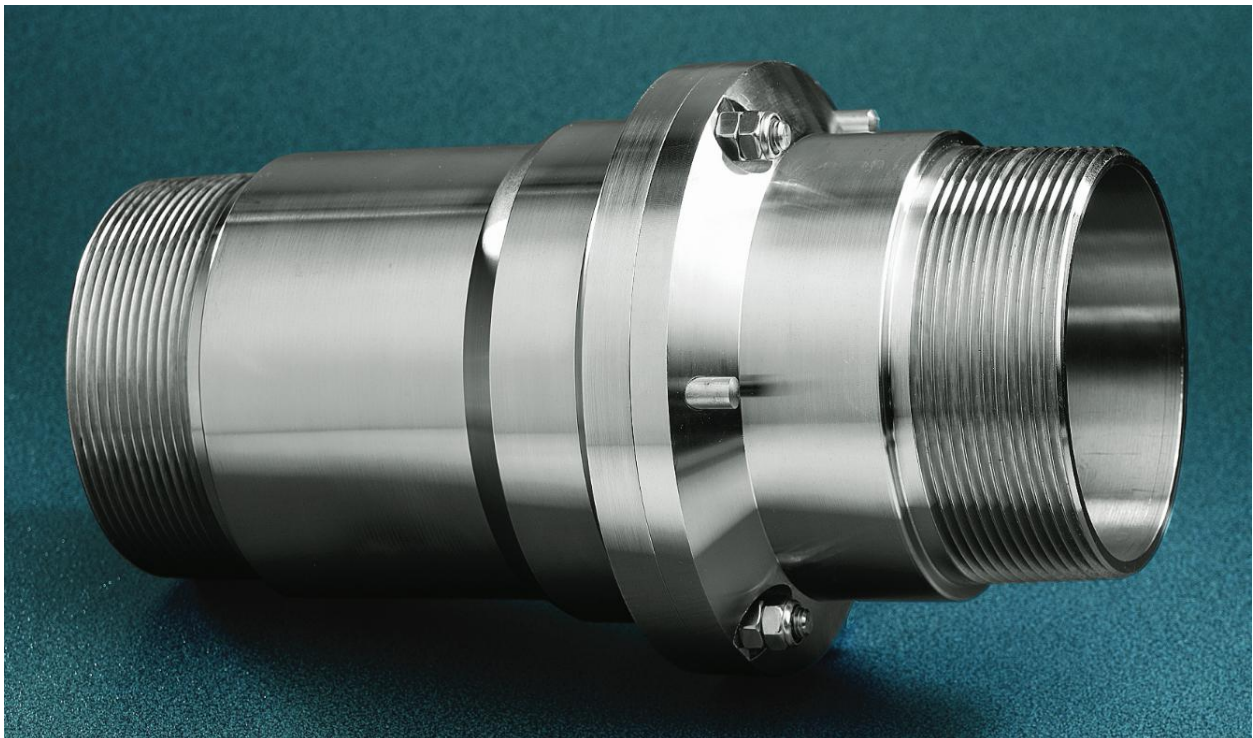

* Should you required any further information, please do not hesitate to email to davinn@sunway.com.my or smsgen@sunflex.com.sg.

The Safe Solution for you and the environment