


SUNFLEX 012N - CLEAR

Non Toxic Suction & Delivery

Applications:

Normal Suction And Delivery Of Potable Water And Foodstuffs Such As Beverages, Juices, Beer, Wine, Distillates Up To 28° Alcohol, Milk etc.

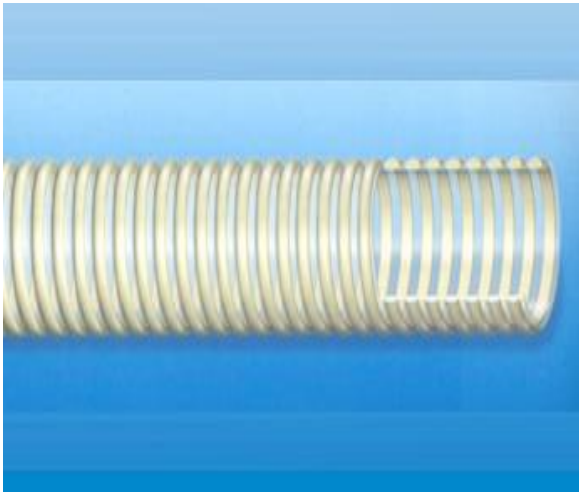

Structure	: Rigid PVC White Spiral - Smooth Inside : Clear Transparent PVC Wall
Tolerances	: +/- 5%
Internal Diameter	: +/- 2%
Working Temperature	: Static Conditions: -20°C To +65°C : Dynamic Conditions: -5°C To +43°C

Part Number	Internal Diameter		Working Pressure kp/cm ² (23 +/- 2°C)	Vaccum mbar (23 +/- 2°C)	Bending Radius mm (23 +/- 2°C)	Coil Length m/roll	Hose Weight g/mt	
	mm	inch						
012013N	13	1/2	11.0	750	58	25/30/50	160	
012016N	16	5/8	10.0		72		180	
012019N	19	3/4	9.0		85		270	
012025N	25	1	8.0		112		300	
012032N	32	1-1/4	7.0		144		400	
012038N	38	1-1/2	7.0		171		500	
012045N	45	1-3/4	5.5		202		630	
012051N	51	2	5.5		225		765	
012063N	63	2-1/2	5.0		283		990	
012076N	76	3	4.0		337		1260	
012090N	90	3-1/2	4.0		405		1620	
012102N	102	4	4.0		459		1980	
012127N	127	5	3.0		562		25/30	2880
012152N	152	6	2.5		675			3870
012203N	203	8	2.0	900	20	5850		